



EFPMC DIN 6799

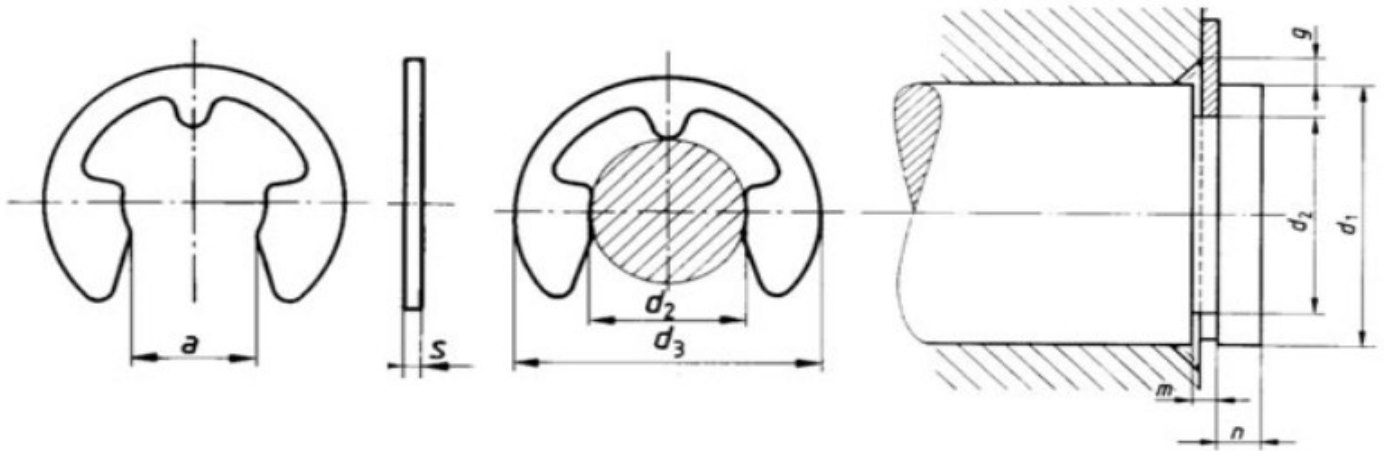

Code	d2	d1 Min.	d1 Max.	s	a	d2	m	n Min.	d3 max.	g
EFPMC1	0.8	1	1.4	0.2	0.58	0.8	0.24	0.4	2.25	0.3
EFPMC2	1.2	1.4	2	0.3	1.01	1.2	0.34	0.6	3.25	0.4
EFPMC3	1.5	2	2.5	0.4	1.28	1.5	0.44	0.8	4.25	0.6
EFPMC4	1.9	2.5	3	0.5	1.61	1.9	0.54	1	4.8	0.7
EFPMC5	2.3	3	4	0.6	1.94	2.3	0.64	1	6.3	0.9
EFPMC6	3.2	4	5	0.6	2.7	3.2	0.64	1	7.3	0.9
EFPMC7	4	5	7	0.7	3.34	4	0.74	1.2	9.3	1
EFPMC8	5	6	8	0.7	4.11	5	0.74	1.2	11.3	1
EFPMC9	6	7	9	0.7	5.26	6	0.74	1.2	12.3	1.1
EFPMC10	7	8	11	0.9	5.84	7	0.94	1.5	14.3	1.3
EFPMC11	8	9	12	1	6.52	8	1.05	1.8	16.3	1.5
EFPMC12	9	10	14	1.1	7.63	9	1.15	2	18.8	1.6
EFPMC13	10	11	15	1.2	8.32	10	1.25	2	20.4	1.8
EFPMC14	12	13	18	1.3	10.45	12	1.35	2.5	23.4	1.9
EFPMC15	15	16	24	1.5	12.61	15	1.55	3	29.4	2.2
EFPMC16	19	20	31	1.75	15.92	19	1.8	3.5	37.6	2.5
EFPMC17	24	25	38	2	21.88	24	2.05	4	44.6	3
EFPMC18	30	32	42	2.5	25.8	30	2.55	4.5	52.6	3.5

DIN 6799 – Retaining washers for shafts

EFPNC DIN 94

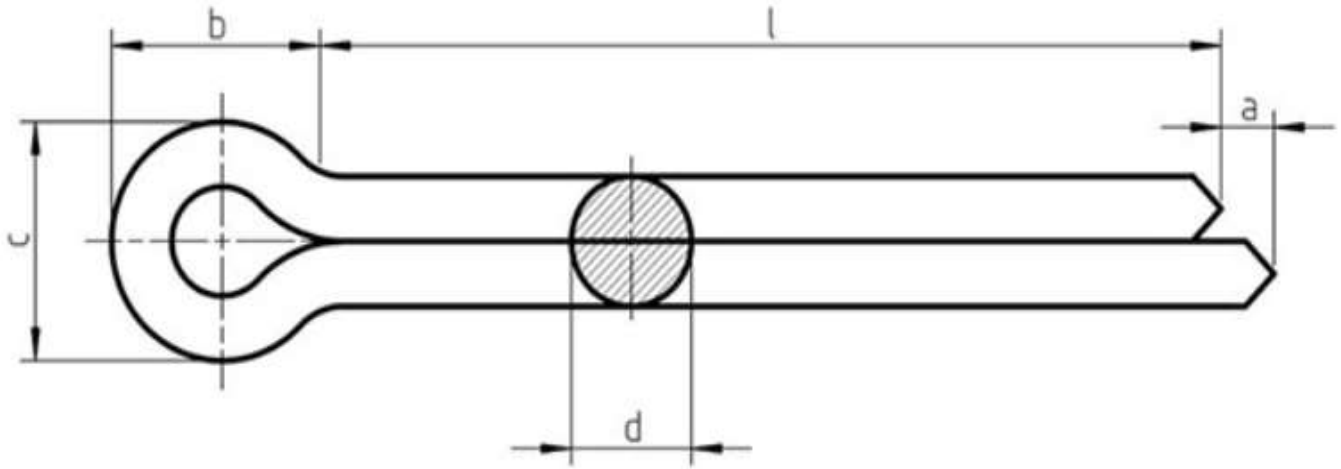

Code	Delik çapı	d	L	A min.	B	C maks.
EFPNC1	1	0,9	10	0,8	3	1,8
EFPNC2	1	0,9	12	0,8	3	1,8
EFPNC3	1	0,9	25	0,8	3	1,8
EFPNC4	1,6	1,4	12	1,25	3,2	2,8
EFPNC5	1,6	1,4	16	1,25	3,2	2,8
EFPNC6	1,6	1,4	32	1,25	3,2	2,8
EFPNC7	2	1,8	10	1,25	4	3,6
EFPNC8	2	1,8	16	1,25	4	3,6
EFPNC9	2	1,8	20	1,25	4	3,6
EFPNC10	2,5	2,3	20	1,25	5	4,6
EFPNC11	2,5	2,3	25	1,25	5	4,6
EFPNC12	3,2	2,9	16	1,6	6,4	5,8
EFPNC13	3,2	2,9	20	1,6	6,4	5,8
EFPNC14	3,2	2,9	63	1,6	6,4	5,8
EFPNC15	4	3,7	20	2	8	7,4
EFPNC16	4	3,7	25	2	8	7,4
EFPNC17	4	3,7	80	2	8	7,4
EFPNC18	5	4,6	25	2	10	9,2

DIN 94 – Split pins