


INOX (INX)

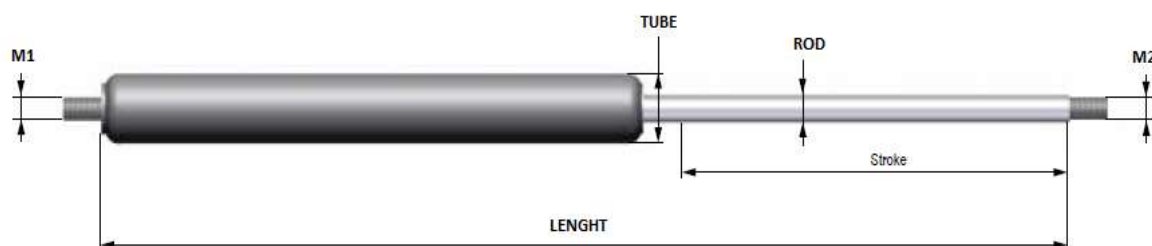

SIZE	ROD	TUBE	LS	LE	M1	M2	FORCE
3/8	Ø3	Ø8	10-100	2xLS+27	M3x0,6	M3x0,6	0-100
4/12	Ø4	Ø12	10-100	2xLS+28	M4x0,7	M4x0,7	0-200
6/15	Ø6	Ø6	10-150	2xLS+33	M6x1	M6x1	0-400
8/18	Ø8	Ø15	10-300	2xLS+41	M6x1	M6x1	0-800
10/22	Ø10	Ø18	10-350	2xLS+45	M8x1,25	M8x1,25	0-1200
10/27	Ø10	Ø27	10-350	2xLS+50	M8x1,25	M8x1,25	0-1300
14/27	Ø14	Ø27	10-350	2xLS+50	M10x1,5	M10x1,5	0-2500

Standart product properties

*Cylinder Stainless Steel 304

*Rod Stainless Steel 304

*Cylinder: Threaded

*Working temprature range -30 °C min +80 °C

*The tecnical specifications and design of the gas springs should be matched to the respective application and the gas springs should be installed properly.

*Gas springs should be stored and installed rod downwards.

*Rods should not be damaged painted or scratched.

*Food grade oil available on request

*Special temperature seals available on request

Ordering Example

TYP-SIZE-LE-LS-M1M2-FORCE
INX-818-50-141-M1M2-N

Specific reference shall be given on the technical confirmation drawing.

[Contact Us](#)