

Preassure Adjustable (VLVS)



SIZE	ROD (D1)	TUBE (D2)	LS	LE	M1	M2	FORCE
6/15	Ø6	Ø15	10-150	2xLS+33	M6x1	M6x1	0-400
8/18	Ø8	Ø18	10-300	2xLS+41	M6x1	M6x1	0-800
10/22	Ø10	Ø22	10-350	2xLS+45	M8x1,25	M8x1,25	0-1200
10/27	Ø10	Ø27	10-350	2xLS+50	M8x1,25	M8x1,25	0-1350
14/27	Ø14	Ø27	10-350	2xLS+50	M10x1,5	M10x1,5	0-2500

Standart product properties

- *Black painted tube
- *Rod Black Nitrated
- *Cylinder: Threaded
- *Working temprature range -30 °C min +80 °C
- *The tecnical specifications and design of the gas springs should be matched to the respective application and the gas springs should be installed properly.
- *Gas springs should be stored and installed rod downwards.
- *Rods should not be damaged painted or scratched.


Ordering Example

TYP-SIZE-LE-LS-M1M2-FORCE
VLVS-818-50-141-M1M2-N

Specific reference shall be given on the technical confirmation drawing.

[Contact Us](#)

Preassure Adjustable (VLVT)

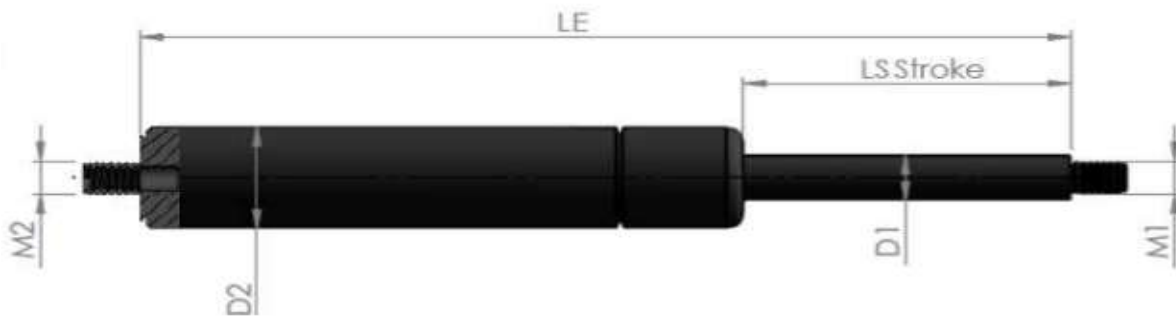

SIZE	ROD (D1)	TUBE (D2)	LS	LE	M1	M2	FORCE
6/15	Ø6	Ø15	10-150	2xLS+33	M6x1	M6x1	0-400
8/18	Ø8	Ø18	10-300	2xLS+41	M6x1	M6x1	0-800
10/22	Ø10	Ø22	10-350	2xLS+45	M8x1,25	M8x1,25	0-1200
10/27	Ø10	Ø27	10-350	2xLS+50	M8x1,25	M8x1,25	0-1350
14/27	Ø14	Ø27	10-350	2xLS+50	M10x1,5	M10x1,5	0-2500

Standart product properties

- *Black painted tube
- *Rod Black Nitrated
- *Cylinder: Threaded
- *Working temprature range -30 °C min +80 °C
- *The tecnical specifications and design of the gas springs should be matched to the respective application and the gas springs should be installed properly.
- *Gas springs should be stored and installed rod downwards.
- *Rods should not be damaged painted or scratched.

Ordering Example

TYP-SIZE-LE-LS-M1M2-FORCE
VLVT-818-50-141-M1M2-N

Specific reference shall be given on the technical confirmation drawing.

[Contact Us](#)